




I.L. MOTORSPORT

Installation Instruction

Aluminum Performance bar front NC

NC0-0963

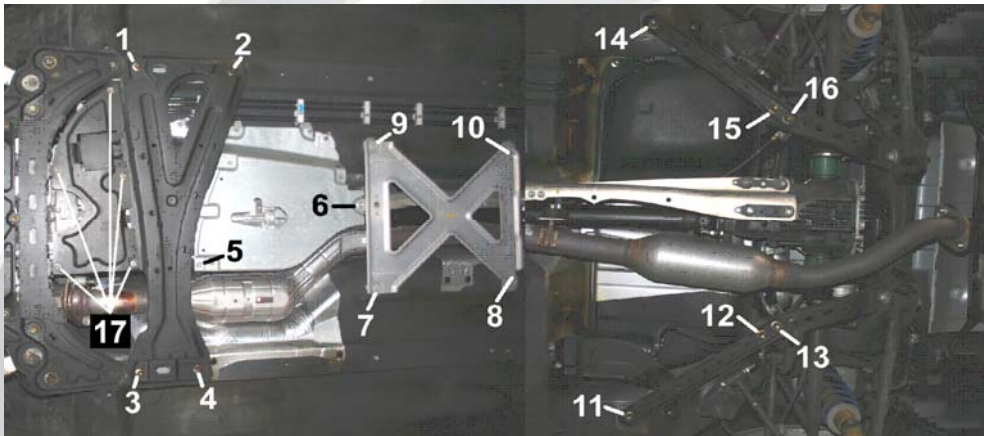

Picture 1

To install the front performance bar please loosen the screws on positions 1 – 5 and remove the OEM metal bar. (Picture 1)

When installing the aluminum performance bar please use the OEM screws (Picture 2).


For positions 5 (1 piece) and 17 (3 pieces) please use the supplied nuts.



Copyright by I.L. Motorsport

Picture 2

Please check if all nuts are tightend and torque them (see torque table)

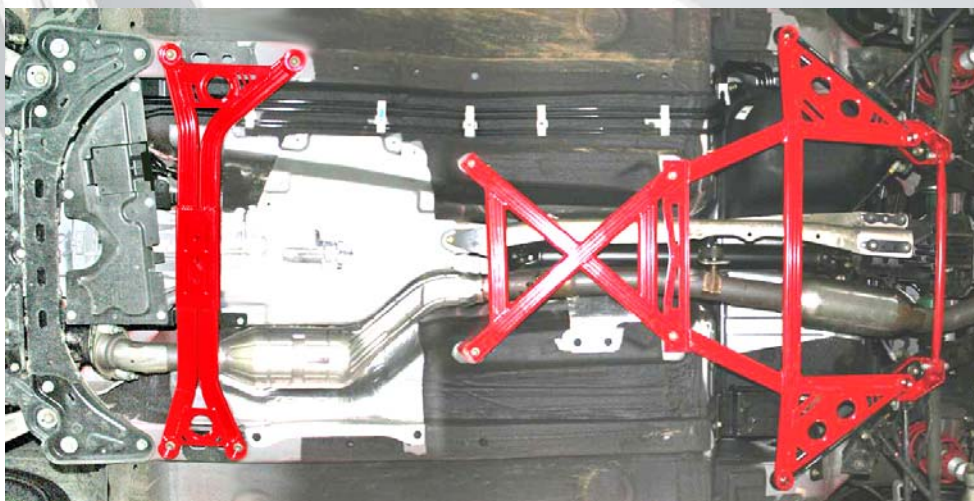

Picture 3



I.L. MOTORSPORT

Installation Instruction

Aluminum Performance bar front NC

NC0-0963

Torque table:

1 → 17,7 – 26,5 Nm
2 → 17,7 – 26,5 Nm
3 → 17,7 – 26,5 Nm
4 → 17,7 – 26,5 Nm
5 → 3 – 5 Nm
17 → 3 – 5 Nm

When installing the small engine under tray please also install the retaining plate for correct functionality of the inspection flap.
(Picture 4)



Picture 4